



OFM-070 Series

Open-Frame Industrial Monitor



Features

- Low Power Consumption for P-Cap Touch Screen
- High contrast color TFT-LCD Monitor support resolution
- Advanced OSD control
- **Operating temperature: -10 ~ 60°C**

Specification

Display

Model	OFM-070A	OFM-07TA
Screen Size	7" TFT LCD Panel	7" TFT LCD Panel
Resolution	800 x 480	800 x 480
View Angle	70°/70°/50°/70° (R/L/U/D)	70°/70°/50°/70° (R/L/U/D)
Brightness	400 cd/m ²	400 cd/m ²
Color Support	16.7M	16.7M
Contrast Ratio	500:1	500:1
Response Time	15(msec)	15(msec)
Backlight Life	20,000hrs	20,000hrs

TouchScreen

T/S Type	N/A	Projected Capacitive Touchscreen
Surface Hardness	N/A	3H / 6H
Transparency	N/A	80% / 85%

Environmental

Operating Temp.	-10 ~ 60°C (14 ~ 140°F)	-10 ~ 60°C (14 ~ 140°F)
Storage Temp.	-20 ~ 70°C (-4 ~ 158°F)	-20 ~ 70°C (-4 ~ 158°F)
Humidity	5~90%, 40°C	5~90%, 40°C

I/O Ports

Video Port	1 x VGA video input 1 x HDMI video input 1 x AV video input	1 x VGA video input 1 x HDMI video input 1 x AV video input
------------	---	---

Qualification

Certification	CE, FCC Class A	CE, FCC Class A
---------------	-----------------	-----------------

Power Requirement

Power Input	DC 12V / 2A input	DC 12V / 2A input
Power Consumption	Max. 5.4W	Max. 5.4W


OSD Key

Buttons	Yes (with 5 physical buttons to control the device) 1 x Power key; 1 x Menu key; 1 x Auto key; 2 x Arrow key
---------	---


Dimension

Unit:mm

Open Frame LCD Monitor

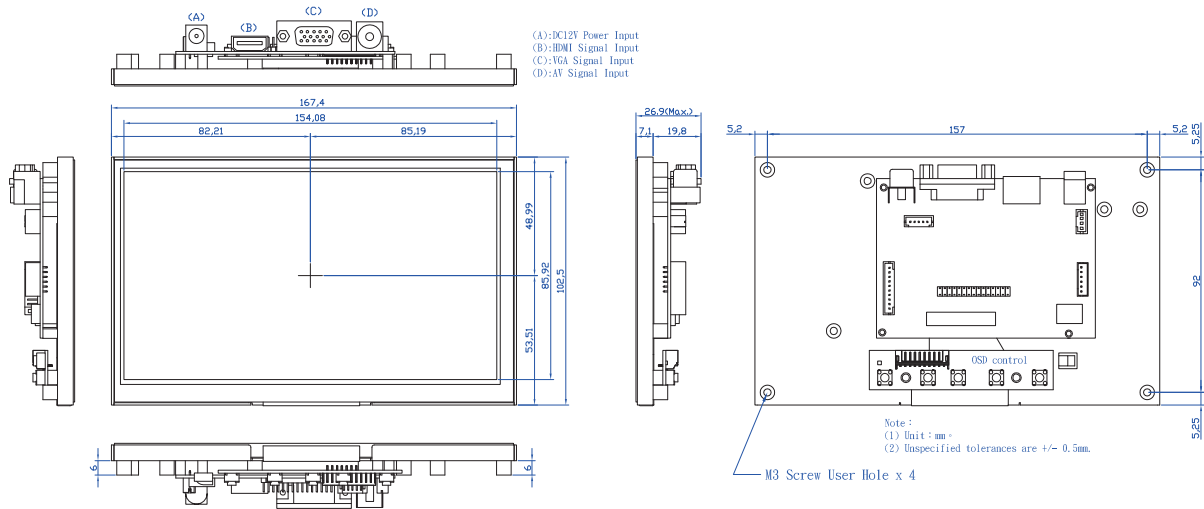

Open Frame Touch LCD Monitor (P-Cap TP)

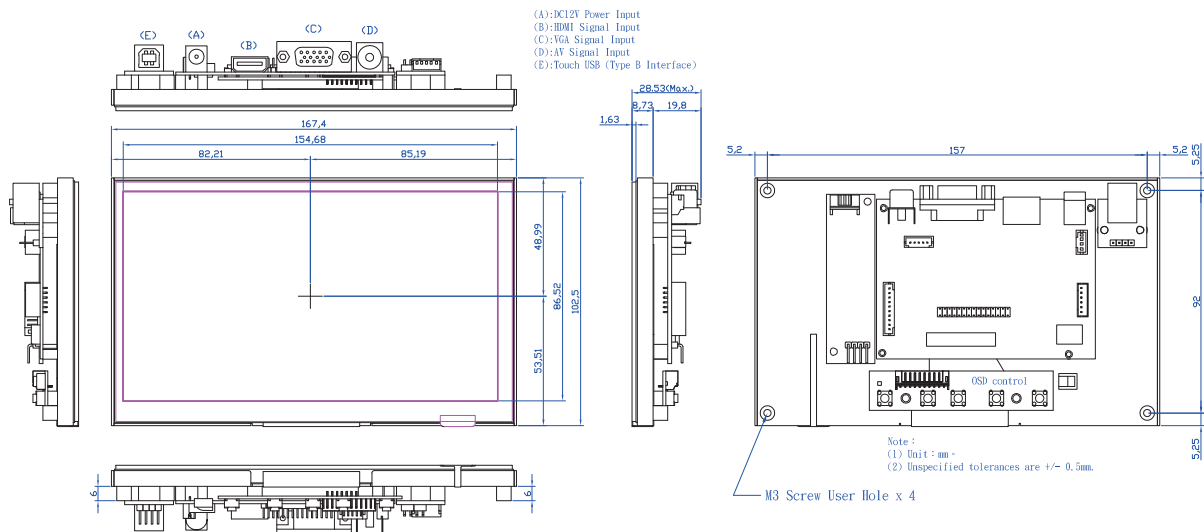

Ordering Information

OFM-07TA 7" LCD Open Frame Monitor, WVGA, 400cd/m², P-Cap Touch Screen

OFM-070A 7" LCD Open Frame Monitor, WVGA, 400cd/m², non-Touch

Optional Accessory

Power Cord (US Plug) Power Cord / 1.8M, W/3-pin plug, US Plug

Power Cord (EU Plug) Power Cord / 1.8M, W/2-pin plug, EU Plug