

OFM-121 Series

Open-Frame Industrial Monitor



Features

- High contrast color TFT-LCD Monitor support resolution up to 1024*768
- Advanced OSD control
- High brightness with 1000/1500 nits for outdoor applications
- Steel frame for various applications
- **Operating temperature: -30 ~ 85°C**



Specification

Display

Model	OFM-121S	OFM-121P	OFM-121A	OFM-121H
Screen Size	12.1" LED Panel	12.1" LED Panel	12.1" LED Panel	12.1" LED Panel
Resolution	1024 x 768	1024 x 768	1024 x 768	1024 x 768
View Angle	80°/80°/80°/80° (R/L/U/D)	80°/80°/80°/80° (R/L/U/D)	80°/80°/80°/80° (R/L/U/D)	80°/80°/80°/80° (R/L/U/D)
Brightness	500 cd/m ²	500 cd/m ²	1000 cd/m ²	1500 cd/m ²
Color Support	16.7M	16.7M	16.7M	16.7M
Contrast Ratio	700:1	700:1	700:1	700:1
Response Time	35(msec)	35(msec)	35(msec)	35(msec)
Backlight Life	50,000hrs	50,000hrs	50,000hrs	50,000hrs

Touch Screen (Optional)

T/S Type	Non-Touchscreen	P-Cap Touchscreen	P-Cap Touchscreen	P-Cap Touchscreen
Surface Hardness	3H / 6H	3H / 6H	3H / 6H	3H / 6H
Transparency	80% / 85%	80% / 85%	80% / 85%	80% / 85%

Environmental

Operating Temp.	-30 ~ 85°C (-22 ~ 185°F)	-30 ~ 85°C (-22 ~ 185°F)	-30 ~ 85°C (-22 ~ 185°F)	-30 ~ 85°C (-22 ~ 185°F)
Storage Temp.	-30 ~ 85°C (-22 ~ 185°F)	-30 ~ 85°C (-22 ~ 185°F)	-30 ~ 85°C (-22 ~ 185°F)	-30 ~ 85°C (-22 ~ 185°F)
Humidity	5~90%, 40°C	5~90%, 40°C	5~90%, 40°C	5~90%, 40°C

I/O Ports

Video Port	1 x VGA video input 1 x DVI video input 1 x HDMI	1 x VGA video input 1 x DVI video input 1 x HDMI	1 x VGA video input 1 x DVI video input 1 x HDMI	1 x VGA video input 1 x DVI video input 1 x HDMI
Audio	Yes	Yes	Yes	Yes

Qualification

Certification	CE, FCC Class A
---------------	-----------------

Power Requirement

Power Input	DC 12V / 4.16A input	DC 12V / 4.16A input	DC 12V / 4.16A input	DC 12V / 4.16A input
Power Consumption	Max. 12W	Max. 12W	Max. 12W	Max. 12W


All specifications are subject to change without notice.

OSD Key

Buttons

Yes (with 5 physical buttons to control the device)
1 x Power key; 1 x Menu key; 1 x Auto key; 2 x Arrow key

Dimensions

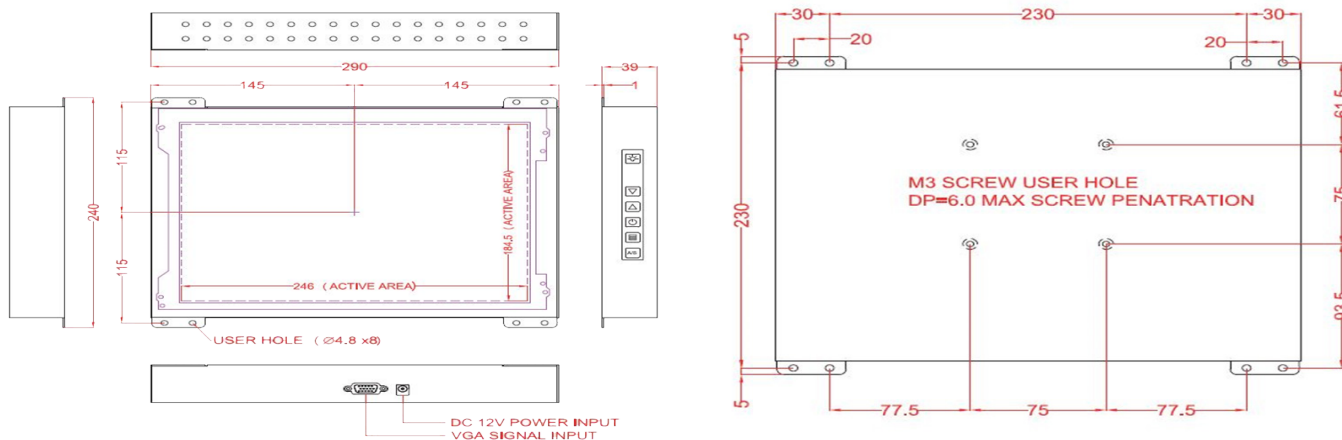

Ordering Information

OFM-121S	12.1" LCD Open Frame Monitor, XGA, 500 cd/m ² , non-Touch
OFM-121P	12.1" LCD Open Frame Monitor, XGA, 500 cd/m ² , P-Cap Touch
OFM-121A	12.1" LCD Open Frame Monitor, XGA, 1000 cd/m ² , P-Cap Touch
OFM-121H	12.1" LCD Open Frame Monitor, XGA, 1500 cd/m ² , P-Cap Touch

Optional Accessories

Power Cord (US Plug) Power Cord / 1.8M, W/3-pin plug, US Plug

Power Cord (EU Plug) Power Cord / 1.8M, W/2-pin plug, EU Plug