

SB-122-2J64

Industrial Fanless PC w/ Intel® Elkhart Lake Celeron® J6412 Processor



Features

- Intel® Celeron® J6412 CPU Elkhart Lake (2.0 GHz/2.6GHz)
- 1 x SDRAM DDR4 3200 MHz (max. 32G)
- Support 1 x Gigabit & 1 x 2.5Gigabit LANs
- Support DP/HDMI video output
- Support M.2 SATA SSD
- Small size (Palm-size), convenient to install
- Support Over-voltage & Reversed Power Insertion Protection



HDMI



Over-voltage
Protection



USB 3.1



-20~60°C



Wide Voltage
Range



Reversed
Power Insertion
Protection

System

CPU	Intel® Celeron® J6412 CPU Elkhart Lake (2.0GHz/2.6GHz)
Memory	1 x DDR4 SO-DIMM socket, supporting 3200 MHz SDRAM up to 32GB
Chipset	Integrated in CPU
Graphics	Integrated Intel® UHD Graphics for 10 th Gen Intel® Processors
LAN Chipset	1 x Intel® I210-AT GbE controller 1 x Intel® I226-V 2.5GbE controller
Watchdog Timer	1~255 levels reset

Storage

Device	1 x M.2 M Key 2242 slot (SATA signal)
--------	---------------------------------------

Power System

Power Input	12-24V DC, 2-pin phoenix connector
-------------	------------------------------------

OS

Windows 10/11, Ubuntu 20.04

Qualification

Certification	CE, FCC
---------------	---------

External I/O

Serial Ports	2 x RS-232/422/485 (default RS-232) with auto flow control
USB Ports	2 x USB3.1 2 x USB2.0
LAN	2 x RJ45
Video Ports	1 x HDMI (Max Resolution: 4096 x 2160@60Hz) 1 x DP (Max Resolution: 4096 x 2160@60Hz)

Internal I/O

USB Ports	2 x USB2.0
Expansion Slot	1 x M.2 M Key 2242 slot (SATA signal supported) 1 x MiniPCIe slot (PCIe/USB2.0 signal supported) 1 x M.2 E Key 2230 slot (PCIe/USB2.0 signal supported)

Mechanical


Construction	Aluminum alloy
Mounting	Book-mount, Wall-mount, DIN-Rail(optional)
Dimension (W x H x D)	165 x 120 x 50 mm (6.5" x 4.72" x 1.97")
Weight	0.8kg

Environmental


Operating Temp.	-20 ~ 60°C (-4 ~ 140°F), ambient w/ air flow (WT RAM & SSD)
Storage Temp.	-40 ~ 85°C (-40 ~ 185°F)
Operating Humidity	5 ~ 95% @ 40°C (non-condensing)
Vibration	5~500Hz, 2Grms operation
Sine Vibration	5~500Hz, 2Grms, non-operation
Shock	Operation: 10G@11ms Non-operation: 30G@11ms

Dimensions

Book-Mount

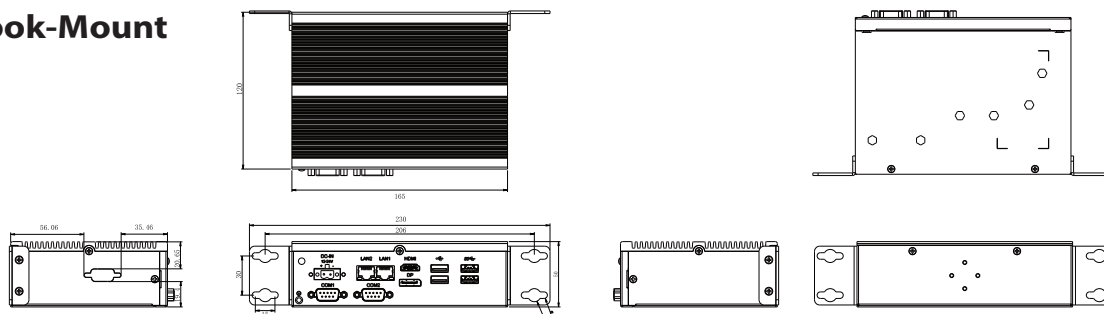

Wall-Mount

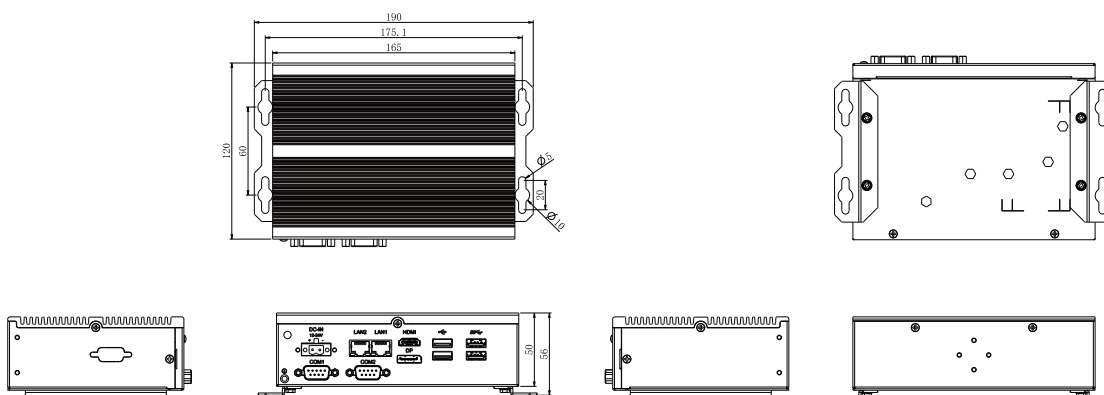

Unit: mm

Packing List

SB-122-2J64	1 pcs BOX PC
Thermal PAD	1 pcs for Memory, 1 pcs for M.2 2242
2-pin terminal block	1 pcs 5mm for Power-input
Wall-mount bracket	2 pcs
Book-mount bracket	2 pcs
Screw Package	1 pcs

Ordering Information

SB-122-2J64	Barebone Fanless System with Intel® Celeron Elkhart Lake J6412
SB-122-2J64-R4S128	Fanless System with commercial 4GB RAM & 128GB SSD, Intel® Celeron Elkhart Lake J6412
SB-122-2J64-R8S128	Fanless System with commercial 8GB RAM & 128GB SSD, Intel® Celeron Elkhart Lake J6412
SPA BOX PC DIN RAIL KIT	DIN Rail Bracket w/Screw, 35mm W25, 25X47.8mm
PAC-60W-FSP-SPA-US R1.0	AC/DC Adapter Kit (w/ UKCA), 12V, 60W, 2 WIRE w/ US POWER CORD
PAC-60W-FSP-SPA-EU R1.0	AC/DC Adapter Kit (w/ UKCA), 12V, 60W, 2 WIRE w/ EU POWER CORD
PAC-60W-FSP-SPA-UK R1.0	AC/DC Adapter Kit (w/ UKCA), 12V, 60W, 2 WIRE w/ UK POWER CORD
PAC-60W-FSP-SPA-IN R1.0	AC/DC Adapter Kit (w/ UKCA), 12V, 60W, 2 WIRE w/ IN POWER CORD
PAC-60W-FSP-SPA-JP R1.0	AC/DC Adapter Kit (w/ UKCA), 12V, 60W, 2 WIRE w/ JP POWER CORD