

SM-211C

Industrial monitor, 21.5" True-Flat Industrial Grade 10 Points Projected Capacitive Touch



Features

- 21.5 inches FHD LCD with LED backlight, front panel support IP65
- Aluminum alloy structure makes it lighter, more stable, and better heat dissipation
- Industrial grade 10-point P-cap multi-touch
- 12V DC-IN, lockable phoenix connector
- Support standard VESA and panel mount



HDMI



-10~60°C

LCD Display

| | |
|--------------------|----------------------------------|
| Size/Type | 21.5 inches TFT LCD Panel |
| Max. Resolution | 1920(H) x 1080(V) |
| Ratio | 16:9 |
| Luminance | 250 nits |
| Contrast Ratio | 1000:1 |
| Backlight Type | LED |
| Backlight Lifetime | 30,000 Hrs |
| View Angle | CR ≥ 10; θx 178°(H) / θy 178°(V) |

Touch Screen

| | |
|------------|---|
| Touch Type | Industrial-grade 10-point P-cap multi-touch |
| Touch | 35,000,000 times |

Power System

| | |
|-------------|--------------------------------------|
| Power Input | 12V DC-IN by 2-pin Phoenix connector |
|-------------|--------------------------------------|

OS

Windows 10, Linux

Qualification

| | |
|---------------|---------|
| Certification | CE, FCC |
|---------------|---------|

External I/O

| | |
|-----------|-------------------|
| USB Ports | 1 x USB for Touch |
|-----------|-------------------|

| | |
|-------------|--------------------------------|
| Video Ports | 1 x HDMI 1 x VGA 1 x DVI |
|-------------|--------------------------------|

Mechanical

| | |
|-----------------------|--|
| Front Panel | Aluminum alloy |
| Rear Cover | SECC |
| Mounting | Panel mount, Wall mount and VESA-mount (75 x 75mm) |
| Dimension (W x H x D) | 528.2 x 321.9 x 44mm |
| Cut out | 520.2 x 313.9mm |
| Weight | 5.5 Kg |
| Ingress Protection | Front panel IP65 |


OSD Menu

| | |
|----------|----------------------------|
| ON / OFF | Power On/Off |
| MENU | Menu / Confirm |
| Auto | Signal input switch / Quit |
| + | Up / Increase |
| - | Down / Decrease |

Environmental

| | |
|--------------------|--|
| Operating Temp. | -10 ~ 60°C (14 ~ 140°F) ambient w/ air flow |
| Storage Temp. | -40 ~ 70°C (-40~ 158°F) |
| Operating Humidity | 5 ~ 95% @ 40°C (non-condensing) |
| Vibration | 5~500Hz, 2Grms operation |
| Shock | Operation: 10G@11ms Non-operation: 30G@11ms |

Dimensions

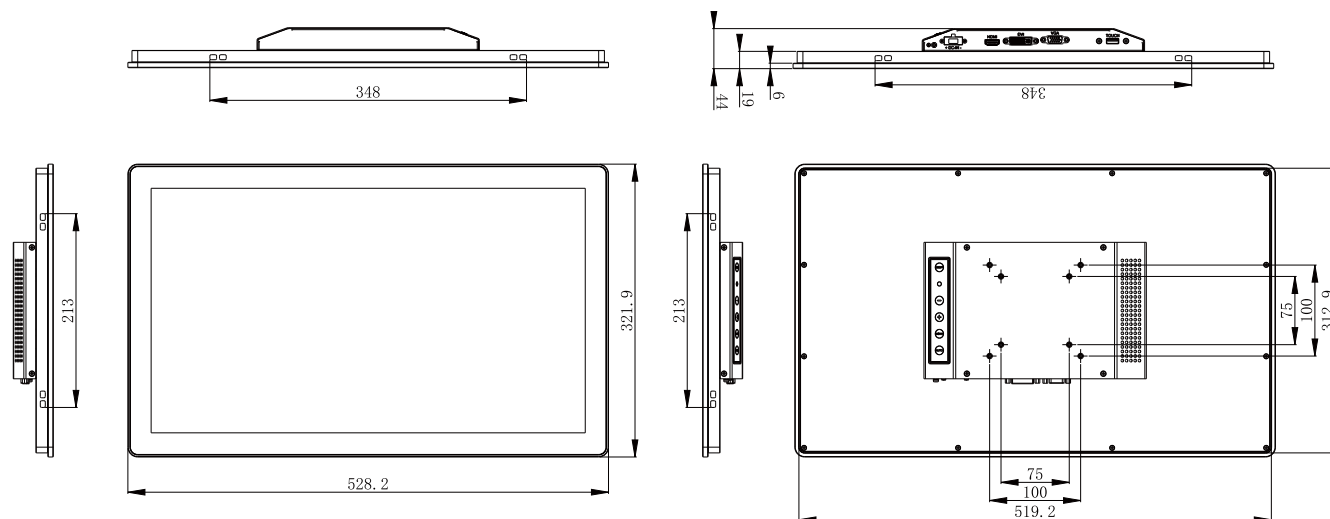

Unit: mm

Packing List

| | |
|---------------------------------|-----------|
| Panel Hook (4 pcs in 1 Package) | 1 package |
| 2-pin DC-in Phoenix connector | 1 pcs |
| VGA Cable | 1 pcs |
| USB Cable | 1 pcs |
| Screw package for VESA | 1 package |

Ordering Information

SM-211C 21.5" (16:9) Industrial Touch Monitor, 10-point P-cap multi-touch



| | |
|-------------------------|--|
| PAC-60W-FSP-SPA-US R1.0 | AC/DC Adapter Kit (w/ UKCA), 12V, 60W, 2 WIRE w/ US POWER CORD |
| PAC-60W-FSP-SPA-EU R1.0 | AC/DC Adapter Kit (w/ UKCA), 12V, 60W, 2 WIRE w/ EU POWER CORD |
| PAC-60W-FSP-SPA-UK R1.0 | AC/DC Adapter Kit (w/ UKCA), 12V, 60W, 2 WIRE w/ UK POWER CORD |
| PAC-60W-FSP-SPA-IN R1.0 | AC/DC Adapter Kit (w/ UKCA), 12V, 60W, 2 WIRE w/ IN POWER CORD |
| PAC-60W-FSP-SPA-JP R1.0 | AC/DC Adapter Kit (w/ UKCA), 12V, 60W, 2 WIRE w/ JP POWER CORD |