

# SM-211C

Industrial monitor, 21.5" True-Flat Industrial Grade 10 Points Projected Capacitive Touch



## Features

- 21.5 inches FHD LCD panel with LED backlight, front panel support IP65
- Aluminum alloy structure makes it lighter, more stable, and better heat dissipation
- Industrial grade 10-point P-cap multi-touch
- 12V DC-IN, lockable phoenix connector
- Support standard VESA(75 x75mm), Panel-mount and Wall-Mount



HDMI



-10~60°C

## LCD Display

Size/Type	21.5" FHD LCD Panel
Max. Resolution	1920(H) x 1080(V)
Ratio	16:9
Luminance	250 cd/m <sup>2</sup>
Contrast Ratio	1000:1
Backlight	LED Backlight
Backlight Lifetime	30000Hrs
Touch Screen	P-cap Multi-Touch
Touch	35,000,000 times
View Angle	CR > 10, 89° (H)/89° (V)

## Power System

Power Input	12V DC-IN by 2-pin Phoenix connector
-------------	--------------------------------------

## OS

Windows 10, Linux	
-------------------	--

## Qualification

Certification	CE, FCC
---------------	---------

## External I/O

USB Ports	1 x USB for Touch
Video Ports	1 x HDMI 1 x VGA 1x DVI

## Mechanical


Mounting Type	Panel Mount, Wall and VESA-mount (75 x 75mm)
Chassis	Aluminum for front Panel and heat-sink, SECC for Rear Cover and back cover
Dimension (W x H x D)	528.2 x 321.9 x 44mm
Cut out	520.2 x 313.9mm
Weight (Net)	5.5 Kg
Ingress Protection	Front panel IP65

## OSD Menu

ON / OFF	Power On/Off
MENU	Menu / Confirm
Auto	Signal input switch / Quit
+	Up / Increase
-	Down / Decrease


## Environmental

Operating Temp.	-10 ~ 60°C
Storage Temp.	-40 ~ 70°C
Operating Humidity	5 ~ 95% (non-condensing)
Random Vibration	5~500Hz, 2Grms operation
Sine Vibration	5~500Hz, 2G Non-operation
Shock	10g 11ms operation, 30g 11ms Non-operation



# SM-211C

## Dimensions

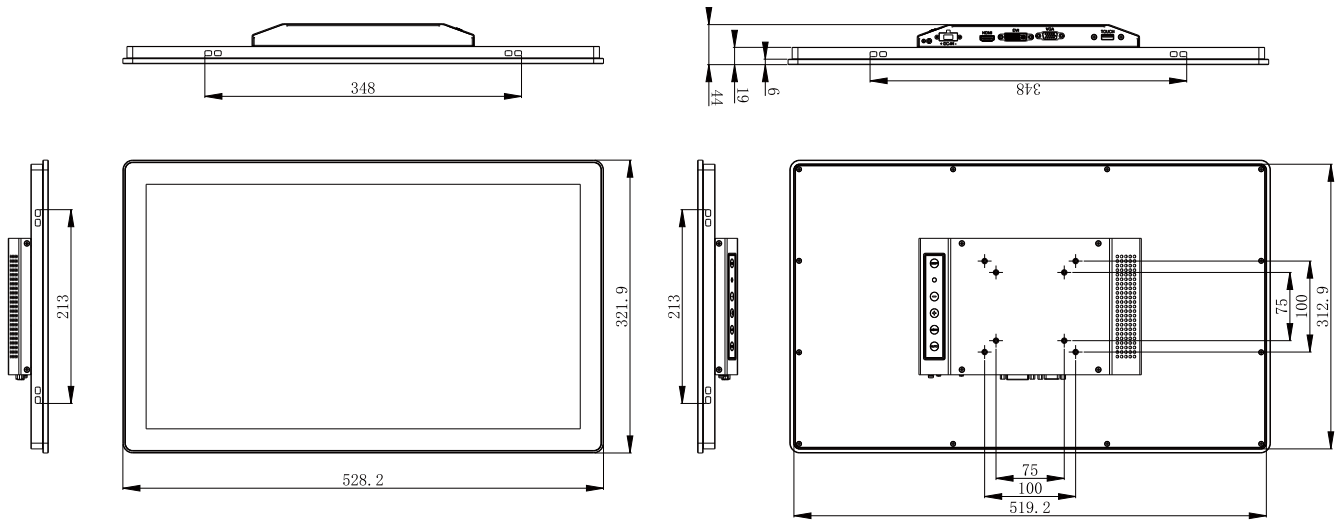

Unit: mm

## Ordering Information

SM-211C 21.5" Industrial Monitor with P-Cap multi-touch



## Standard Accessory

Panel Hook (4pcs in 1 Package)

40W Adapter & Power Cord

1 x VGA Cable

1 x USB Cable