
SB-142-2J64

**Industrial Fanless PC w/Intel® Elkhart Lake
Celeron J6412 Processor**

User Manual

Version 1.0



2025.11

Revision History

Version	Date	Description
1.0	2025.11	Initial release

Revision History	II
Contents	i
Preface.....	iii
Copyright Notice	iii
Declaration of Conformity	iii
CE	iii
FCC Class A	iii
RoHS	iv
SVHC / REACH	iv
Important Safety Instructions	v
Warning.....	vi
Lithium Battery Replacement.....	vi
Technical Support	vi
Warranty.....	vii
Chapter 1 - Introduction.....	1
1.1. Features.....	2
1.2. About this Manual	2
1.3. Specifications.....	3
1.4. Inside the Package	5
Chapter 2 - Getting Started.....	7
2.1. Dimensions	8
2.2. Overview	9
2.2.1. Front and Rear side View	9
2.2.2. DC-IN Power Input.....	10
2.2.3. HDMI/DP Output.....	10
2.2.4. Serial Port Connector (COM1, COM2).....	11
2.2.5. USB Port.....	11
2.2.6. LAN Port	12
2.2.7. Audio Connector	12
2.2.8. Power LED Status	12
2.2.9. Antenna Hole	13
2.3. Internal Connector / Jumper	14
2.3.1. M.2 2242	15
2.3.2. DDR4 SO-DIMM socket.....	15
2.3.3. AT/ATX Selection Jumper (ATX_AT).....	15
2.3.4. JFP1 Pin definition.....	15
2.3.5. Clear CMOS	15

Chapter 3 - Installation & Maintenance17

- 3.1. Installation and Maintenance 18
- 3.2. Install M.2 2242 Storage/Thermal Pad 20
- 3.3. Mounting 21
 - 3.3.1. Wall mounting 21
 - 3.3.2. DIN-Rail mounting 22

Chapter 4 - BIOS23

- 4.1. Main - Sets system Time & Date..... 26
- 4.2. Advanced 27
 - 4.2.1. Turbo Mode Setting 28
 - 4.2.2. COM Mode Setting 29
- 4.3. USB Power Setting in Power Off / Hibernation Mode 31
- 4.4. Auto TURN-ON (AT/ATX)..... 32
- 4.5. Security 33
- 4.6. Boot..... 34
- 4.7. Save & Exit 35

Copyright Notice

All Rights Reserved.

The information in this document is subject to change without prior notice in order to improve the reliability, design and function. It does not represent a commitment on the part of the manufacturer.

Under no circumstances will the manufacturer be liable for any direct, indirect, special, incidental, or consequential damages arising from the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this document may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

Declaration of Conformity

CE

The CE symbol on your product indicates that it is in compliance with the directives of the European Union (EU). A Certificate of Compliance is available by contacting Technical Support.

This product has passed the CE test for environmental specifications when shielded cables are used for external wiring. We recommend the use of shielded cables. This kind of cable is available from ARBOR. Please contact your local supplier for ordering information.

Warning

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

FCC Class A

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

RoHS

ARBOR Technology Corp. certifies that all components in its products are in compliance and conform to the European Union's Restriction of Use of Hazardous Substances in Electrical and Electronic Equipment (RoHS) Directive 2002/95/EC.

The above mentioned directive was published on 2/13/2003. The main purpose of the directive is to prohibit the use of lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), and polybrominated diphenyl ethers (PBDE) in electrical and electronic products. Member states of the EU are to enforce by 7/1/2006.

ARBOR Technology Corp. hereby states that the listed products do not contain unintentional additions of lead, mercury, hex chrome, PBB or PBDB that exceed a maximum concentration value of 0.1% by weight or for cadmium exceed 0.01% by weight, per homogenous material. Homogenous material is defined as a substance or mixture of substances with uniform composition (such as solders, resins, plating, etc.). Lead-free solder is used for all terminations (Sn(96-96.5%), Ag(3.0-3.5%) and Cu(0.5%)).

SVHC / REACH

To minimize the environmental impact and take more responsibility to the earth we live, Arbor hereby confirms all products comply with the restriction of SVHC (Substances of Very High Concern) in (EC) 1907/2006 (REACH --Registration, Evaluation, Authorization, and Restriction of Chemicals) regulated by the European Union.

All substances listed in SVHC < 0.1 % by weight (1000 ppm)

Important Safety Instructions

Read these safety instructions carefully

1. Read all cautions and warnings on the equipment.
2. Place this equipment on a reliable surface when installing. Dropping it or letting it fall may cause damage
3. Make sure the correct voltage is connected to the equipment.
4. For pluggable equipment, the socket outlet should be near the equipment and should be easily accessible.
5. Keep this equipment away from humidity.
6. The openings on the enclosure are for air convection and protect the equipment from overheating. **DO NOT COVER THE OPENINGS.**
7. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
8. Never pour any liquid into opening. This may cause fire or electrical shock.
9. Never open the equipment. For safety reasons, the equipment should be opened only by qualified service personnel.
10. If one of the following situations arises, get the equipment checked by service personnel:
 - a. The power cord or plug is damaged.
 - b. Liquid has penetrated into the equipment.
 - c. The equipment has been exposed to moisture.
 - d. The equipment does not work well, or you cannot get it to work according to the user's manual.
 - e. The equipment has been dropped or damaged.
 - f. The equipment has obvious signs of breakage.
11. Keep this User's Manual for later reference.

Warning

The Box PC and its components contain very delicately Integrated Circuits (IC). To protect the Box PC and its components against damage caused by static electricity, you should always follow the precautions below when handling it:

1. Disconnect your Box PC from the power source when you want to work on the inside.
2. Use a grounded wrist strap when handling computer components.
3. Place components on a grounded antistatic pad or on the bag that came with the Box PC, whenever components are separated from the system.

Lithium Battery Replacement

Incorrect replacement of the lithium battery may lead to a risk of explosion.

The lithium battery must be replaced with an identical battery or a battery type recommended by the manufacturer.

Do not throw lithium batteries into the trash can. It must be disposed of in accordance with local regulations concerning special waste.

Technical Support

If you have any technical difficulties, please consult the user's manual first at:
<https://www.arbor-technology.com>

Please do not hesitate to call or e-mail our customer service when you still cannot find out the answer.

<https://www.arbor-technology.com>

E-mail: info@arbor.com.tw

Warranty

This product is warranted to be in good working order for a period of two year from the date of purchase. Should this product fail to be in good working order at any time during this period, we will, at our option, replace or repair it at no additional charge except as set forth in the following terms. This warranty does not apply to products damaged by misuse, modifications, accident or disaster.

Vendor assumes no liability for any damages, lost profits, lost savings or any other incidental or consequential damage resulting from the use, misuse of, or inability to use this product. Vendor will not be liable for any claim made by any other related party.

Vendors disclaim all other warranties, either expressed or implied, including but not limited to implied warranties of merchantability and fitness for a particular purpose, with respect to the hardware, the accompanying product's manual(s) and written materials, and any accompanying hardware. This limited warranty gives you specific legal rights.

Return authorization must be obtained from the vendor before returned merchandise will be accepted. Authorization can be obtained by calling or faxing the vendor and requesting a Return Merchandise Authorization (RMA) number. Returned goods should always be accompanied by a clear problem description.

This page is intentionally left blank.

Chapter 1

Introduction

1.1. Features

- Intel® Celeron® J6412 CPU Elkhart Lake(2.0 GHz/2.6GHz)
- 1 x SDRAM DDR4 3200 MHz (max. 32GB)
- Support 1 x Gigabit & 3 x 2.5 Gigabit LANs
- Support DP/HDMI video output
- Support M.2 2242 slot (SATA), M.2 2230 slot (Wi-Fi), MiniPCle slot
- Support Over-voltage & Reversed Power Insertion Protection

1.2. About this Manual

This manual is meant for the experienced users and integrators with hardware knowledge of personal computers. If you are not sure about the description in this manual, consult your vendor before further handling.

We recommend that you keep one copy of this manual for the quick reference for any necessary maintenance in the future. Thank you for choosing ARBOR products.

1.3. Specifications

System	
CPU	Intel® Celeron® J6412 CPU Elkhart Lake (2.0 GHz/2.6GHz)
Memory	1 x DDR4 SO-DIMM socket, supporting 3200 MHz SDRAM up to 32GB
Graphics	Intel® UHD Graphics for 10 th Gen Intel® Processors
LAN Chipset	1 x Intel® I210-AT GbE controller 3 x Intel® I226-V for 2.5GbE controllers
Watchdog Timer	Programmable 255 levels timer interval, from 1~255 sec/min
Audio	
Type	1 x Audio (Line-out & Mic-in) (Chipset ALC888S/897)
Storage	
Device	1 x M.2 M Key 2242 slot (SATA signal) *CTOS is available
External I/O	
Serial Ports	2 x RS232/422/485 (default RS232) with auto flow control
USB Ports	2 x USB3.1 2 x USB2.0
LAN	4 x RJ45
Video Ports	1 x HDMI (Max Resolution: 4096 x 2160@60Hz) 1 x DP (Max Resolution: 4096 x 2160@60Hz)
Internal I/O	
Expansion Slot	1 x MiniPCle slot (PCle/USB2.0 signal supported) 1 x M.2 E Key 2230 slot (PCle/USB2.0 signal supported)
SIM Card	1 x SIM Card socket for 3G/4G module
Mechanical	
Button	1 x Power button
LED	1 x Power LED (Green for Power-on, Blink for Sleep mode, Off for Power-off)
Construction	Aluminum Alloy
Dimension (W x H x D)	165 x 125 x 45 mm
Weight	0.9kg

Environmental	
Operating Temp.	-20 ~ 60°C (-4 ~ 140°F), ambient w/ air flow (WT RAM & SSD)
Storage Temp.	-40 ~ 85°C (-40 ~ 185°F)
Operating Humidity	5% ~ 95% @40°C (non-condensing)
Vibration	5~500Hz, 2Grms operation
Shock	Operation: 10G@11ms Non-operation: 30G@11ms
Qualification	
Certification	CE, FCC
Power System	
Power Input	12-24V DC, 2-pin phoenix connector
OS Support	
Windows 10/11	
Ubuntu 20.04	

*CTOS means Configure-to-Order Service.

1.4. Inside the Package

Upon opening the package, carefully inspect the contents. If any of the items is missing or appears damaged, contact your local dealer or distributor. The package should contain the following items:



1 x SB-142-2J64

Accessories

- 1 x M.2 2242 Thermal-Pad
- 1 x Memory Thermal-Pad
- 1 x 2pin DC-IN Connector
- 1 x Screws
- 2 x Wall-mount Bracket

This page is intentionally left blank.


Chapter 2

Getting Started



2.2. Overview

2.2.1. Front and Rear side View

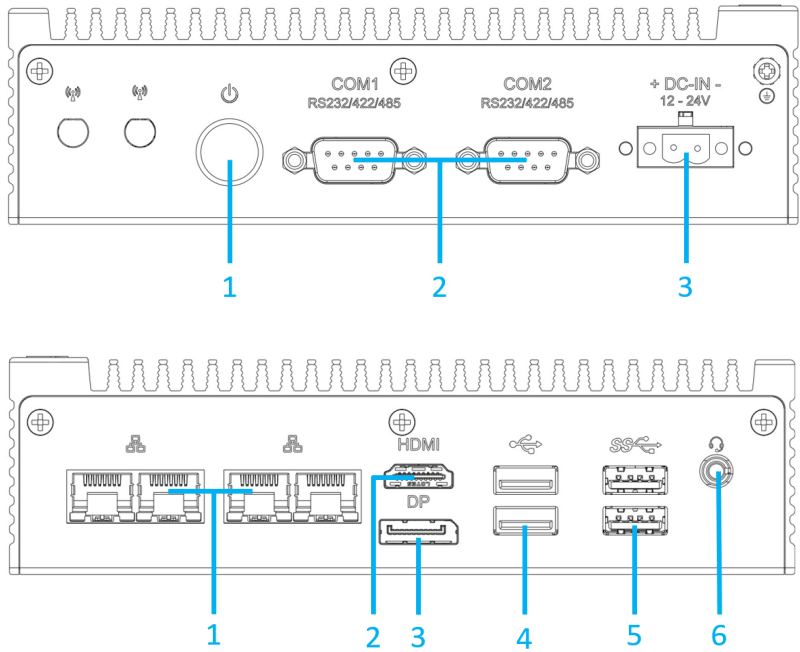


Front Side Connector List

No.	Item	No.	Item
1	Power Button	3	DC-IN
2	COM1/2		

Rear Side Connector List

No.	Item	No.	Item
1	LAN	4	USB 2.0
2	HDMI	5	USB 3.1
3	DP	6	AUDIO

2.2.2. DC-IN Power Input



Pin	Pin Definition	Pin	Pin Definition
1	+12~24V	2	GND

2.2.3. HDMI/DP Output




Figure 2.2.3-1 HDMI / DP Connector

2.2.4. Serial Port Connector (COM1, COM2)


COM1, COM2

Function: RS-232/422/485 Selectable Serial Port

Connector Type: External 9-pin D-sub male connector

Pin Assignment:

	Pin	Description	Pin	Description
RS-232	1	DCD	6	DSR
	2	RXD	7	RTS
	3	TXD	8	CTS
	4	DTR	9	RI
	5	GND		
RS-422	1	Tx-		
	2	Tx+		
	3	Rx+		
	4	Rx-		
	5	GND		
RS-485	1	Data-	4	NC
	2	Data+	5	GND
	3	NC		



Note: COM1/2 support RS232/422/485.

2.2.5. USB Port

Function: USB 3.1/3.0/2.0 Stacked Connectors

Connector Type: USB 3.0/2.0 type A connectors


Pin Assignment: The pin assignments conform to the industry standard.

USB Ver.	Max Speed	Speed name	Max Voltage/Current
USB2.0	480Mbps	High-Speed	DSR 5V/0.5A
USB3.0	5Gbps(500MB/S)	Super-Speed USB	5V/900mA
USB3.1	10Gbps(1000MB/S)	Super-Speed USB	5V/900mA

Note: Support 4 x USB ports, 2 x USB3.1 and 2 x USB2.0

2.2.6. LAN Port

Function: RJ-45 port for Giga LAN
Connector Type: 4 x RJ-45 connectors that support 10/100/1000Mbps fast Ethernet
Pin Assignment: The pin assignments conform to the industry standard.




LED Indicators

Indicator	Function	Status
L	Networking Status	Off: not working Green: Working
R	Networking Speed Status	Off: 10Mbps Green: 100Mbps Orange: 1000Mbps

2.2.7. Audio Connector

Function: For external microphone, headphones or speakers.
Connector Type: 3.5mm audio port interface
Pin Assignment: Support a 2-in-1 audio I/O interface with a 3.5mm hole diameter for external microphones, headphones, or speakers on a 4-segment version devices.



Note: As the microphone pins of Android and iPhone version devices are opposite, they cannot be used the same audio input/output ports.

2.2.8. Power LED Status

Description	Status
Power LED Status	Off: Power off or system is in hibernate mode Green LED permanently: System is working




2.2.9. Antenna Hole

There are 2 antenna reserved holes on the rear panel of the product to facilitate users to install the antenna of the wireless module.



2.3. Internal Connector / Jumper

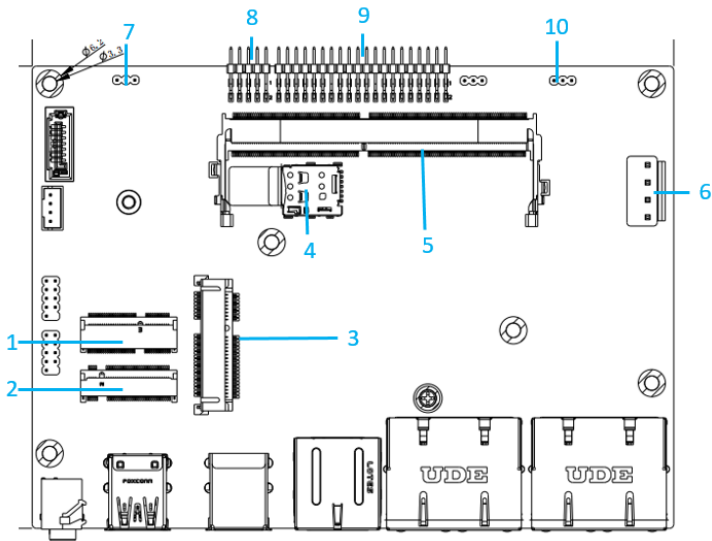

Pin	Pin Definition	Printing
1	M.2 E Key 2230 slot	M.2 2230
2	M.2 M Key 2242 slot	M.2 SSD
3	Mini-PCle	MINIPCIE1
4	SIM Socket	JSIM1
5	DDR4 SO-DIMM socket	DIMM1
6	DC-IN	DC-IN
7	AT/ATX selection mode	ATX_AT
8	Function Reset, LED, Power Button Pin Head	JFP1
9	COM port	J3
10	Clear CMOS Jumper	JCMOS1

2.3.1. M.2 2242


Function: M.2 B-Key Connector
Connector Type: M.2 B-Key connector supporting 22x42 modules
Pin Assignment The pin assignments conform to the industry standard

2.3.2. DDR4 SO-DIMM socket

Function: DDR4 SO-DIMM memory socket
Connector Type: 260-pin DDR4 SO-DIMM memory socket
Pin Assignment The pin assignments conform to the industry standard

2.3.3. AT/ATX Selection Jumper (ATX_AT)

Function: AT/ATX selection mode



Setting:	Pin	Description	
	Short 1-2	AT Mode	
	Short 2-3	ATX mode (default)	

2.3.4. JFP1 Pin definition

Pin	Description	Pin	Description
1	NC	2	NC
3	PWR_SW	4	HWRST_N
5	GND	6	GND
7	PWR_LED-	8	SATA_LED-
9	PWR_LED+	10	SATA_LED+

2.3.5. Clear CMOS

Function: Clears/keeps CMOS
Jumper Type: 2.00 mm pitch 1x2-pin header
Setting:

Pin	Description	
Short	Clears CMOS	
Open	Keeps CMOS (default)	

This page is intentionally left blank.

Chapter 3

Installation & Maintenance

3.1. Installation and Maintenance

1. Remove total 7 screws from the bottom and back, as shown in below Figure 3.1-1.

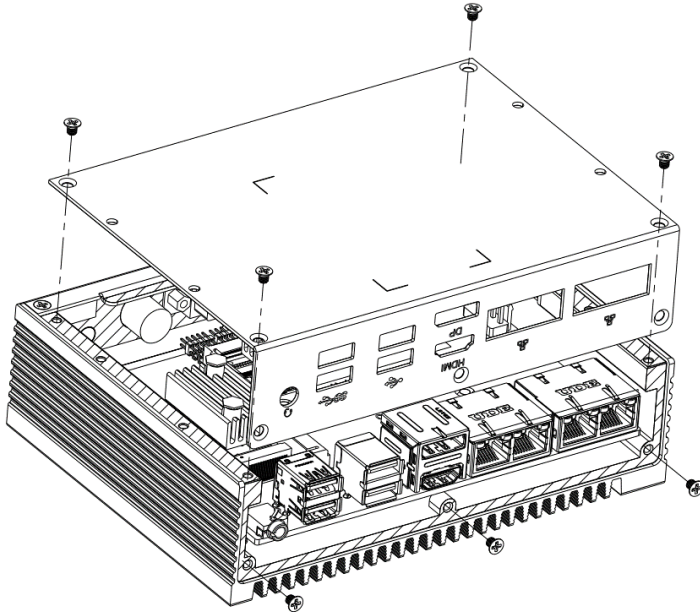


Figure 3.1-1

2. Remove total 4 screws on panel, disassembly schematic diagram as shown in Figure 3.1-2.

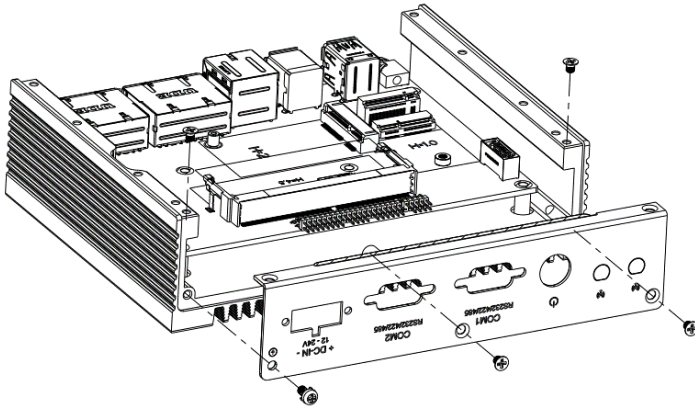


Figure 3.1-2

3. Remove total 6 screws on the main board, disassemble as shown in Figure 3.1-3.


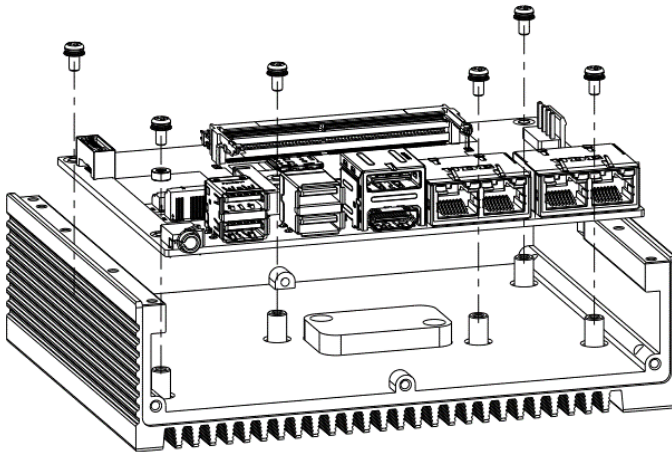


Figure 3.1-3

3.2. Install M.2 2242 Storage/Thermal Pad

1. Remove total 7 screws on the bottom cover include back from the computer as described in 3.1-1
2. Install/Remove the storage from the slot and attach the thermal pad to the storage.
3. Attach the accessory hexagonal studs to the screw holes, insert/remove the storage. Fasten 6 screws of P-head M3, and attach the SSD thermal pad to the M.2 SSD.

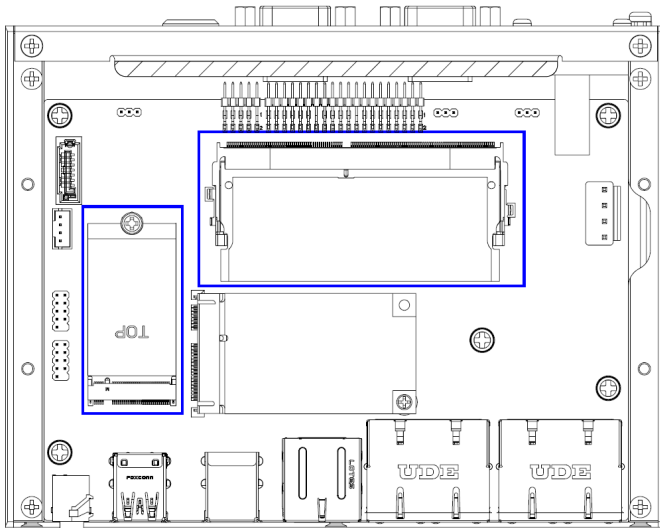


3.3. Mounting

SB-142-2J64 can support Wall mounting and VESA mount and DIN-Rail mounting. DIN-rail mounting requires optional mounting brackets.


3.3.1. Wall mounting

1. Take the wall mount bracket from the box.
2. Put the device on a flat surface, Fasten 4 screws.

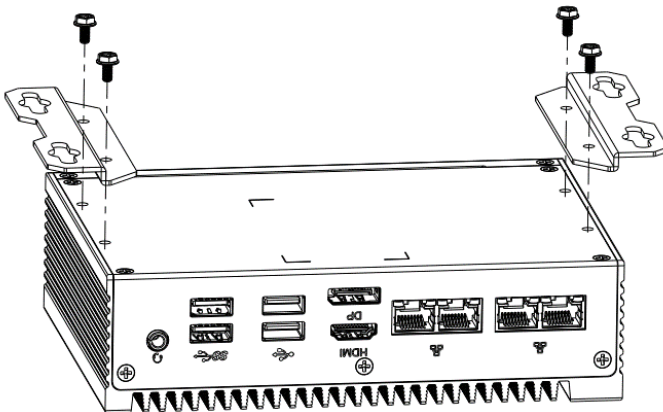

3.3.2. DIN-Rail mounting

1. Take out the VESA bracket and use 4 screws to fix it to the device.
2. Take out the DIN-Rail and use 2 screws to fix it to the VESA bracket

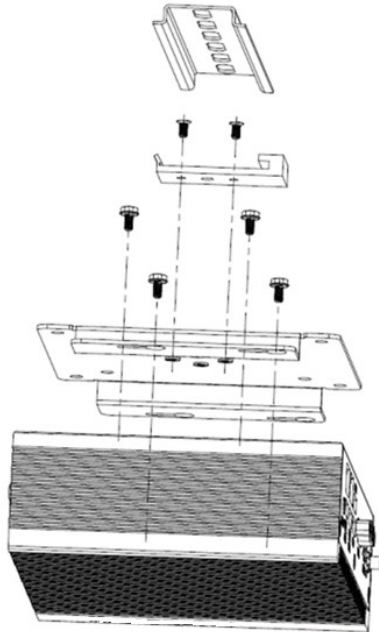

Chapter 4

BIOS

BIOS

The BIOS Setup utility is featured by American Megatrends Inc to configure the system settings stored in the system's BIOS ROM. The BIOS is activated once the computer powers on. When the computer is off, the battery on the main board supplies power to BIOS RAM.

To enter the BIOS Setup utility, keep hitting the “Delete” key upon powering on the computer.



Note: Actual model name and board information varies according to your model.

Key Commands

The BIOS Setup utility relies on a keyboard to receive user's instructions. Hit the following keys to navigate within the utility and use the utility.


Keystroke	Function	Scenes
F7	Enter the boot up sequence menu	After System is Powered ON
Ctrl + Alt + DEL	Restart the system	
← →	Moves left/right between the top menus	In BIOS
↓ ↑	Moves up/down between highlight items	
Enter	Selects an highlighted item/field	
Page Up / +	Increases current value to the next higher value or switches between available options.	
Page Down / -	Decreases current value to the next lower value or switches between available options.	
F1	Load defaults	
F4	Save the Settings and Quit the BIOS	
Esc	<ul style="list-style-type: none"> ▶ On the top menus: Use Esc to quit the utility without saving changes to CMOS. (The screen will prompt a message asking you to select OK or Cancel to exit discarding changes. ▶ On the submenus: Use Esc to quit current screen and return to the top menu. 	

Note: Pay attention to the "WARNING" that shows at the left pane onscreen when making any change to the BIOS settings.

This BIOS Setup utility is updated from time to time to improve system performance and hence the screenshots hereinafter may not fully comply with what you actually have onscreen.

4.1. Main - Sets system Time & Date.


The **Main** menu features the settings of **System Date** and **System Time** and displays some BIOS info.

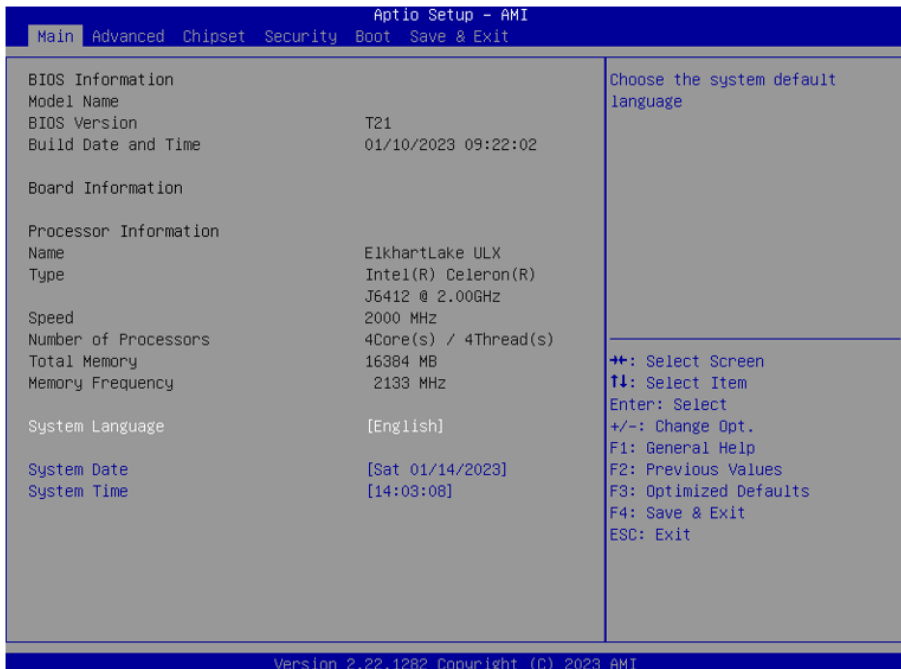


Note: Actual model name and board information varies according to your model.

Setting	Description
System Date	Sets system date.
System Time	Sets system time.

4.2. Advanced

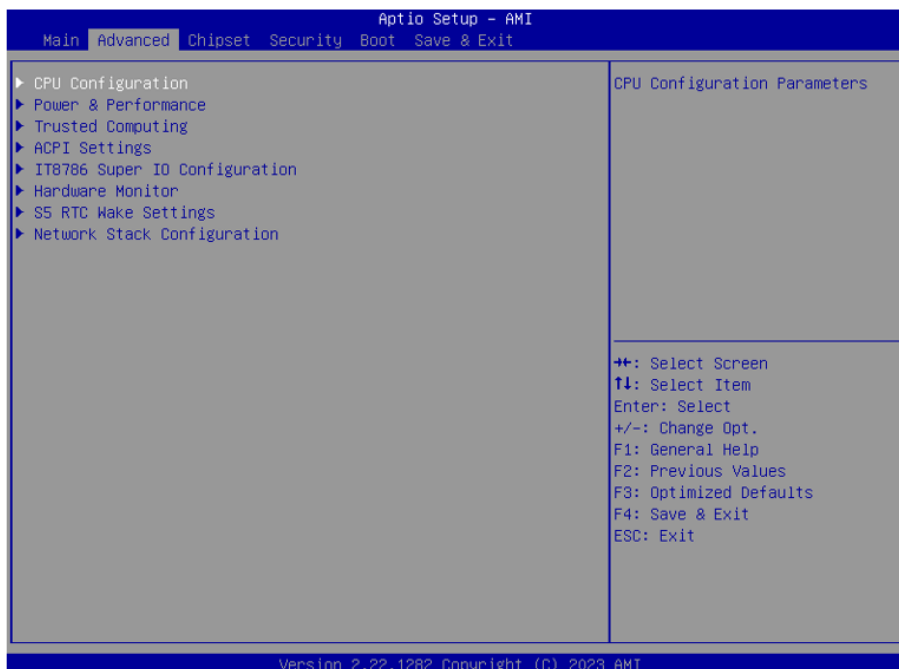



4.2.1. Turbo Mode Setting

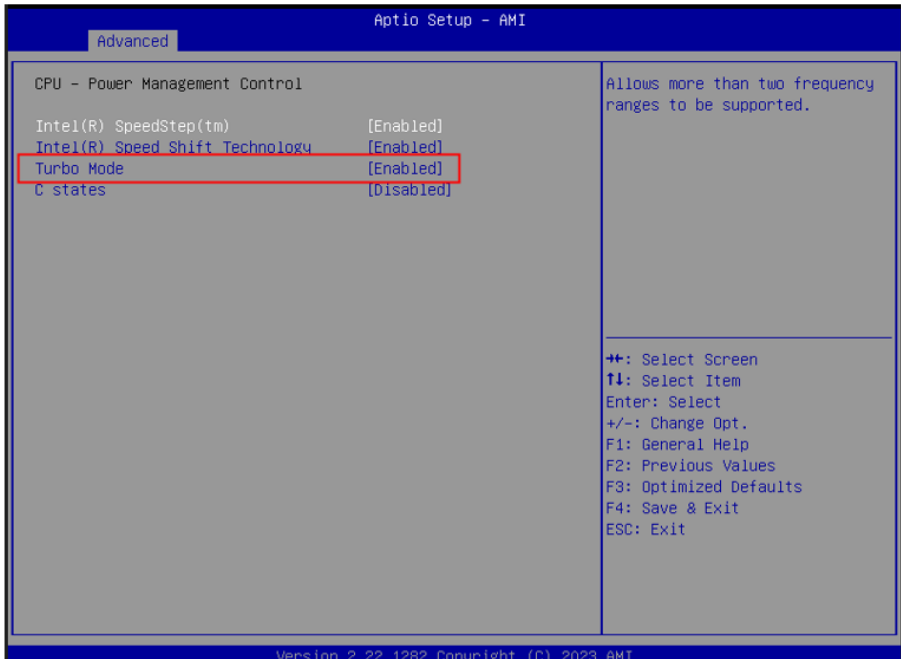

Enter Advanced menu, select **"Power & Performance"** -> **"CPU-Power Management Control"** -> **"Turbo Mode"**. After that users can choose Enabled/Disabled. After setting, press F4 to save and exit, the system will take effect after reboot.



4.2.2. COM Mode Setting

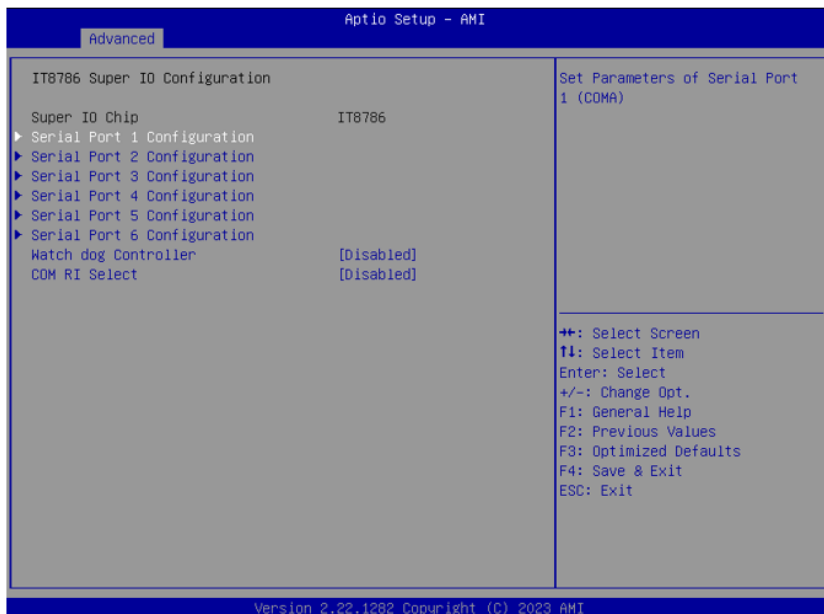

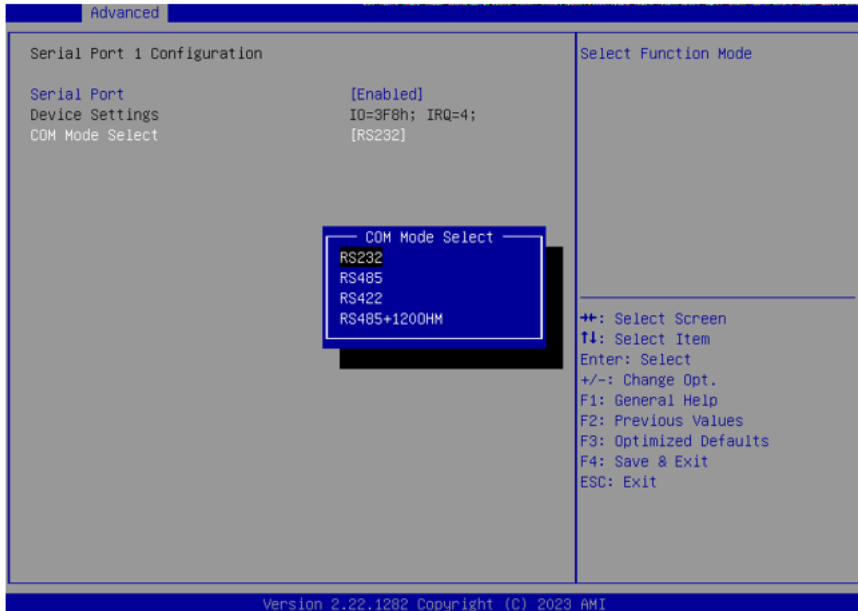


Enter the **Advanced** menu, select "**IT8786 Super IO Configuration**" -> "**Serial Port X Configuration**"-> "**COM Mode Select**", Users can select RS232, RS422, RS485 for COM mode setting. After setting, press F4 to save and exit. The setting will take effect after the system reboot.

4.3. USB Power Setting in Power Off / Hibernation Mode

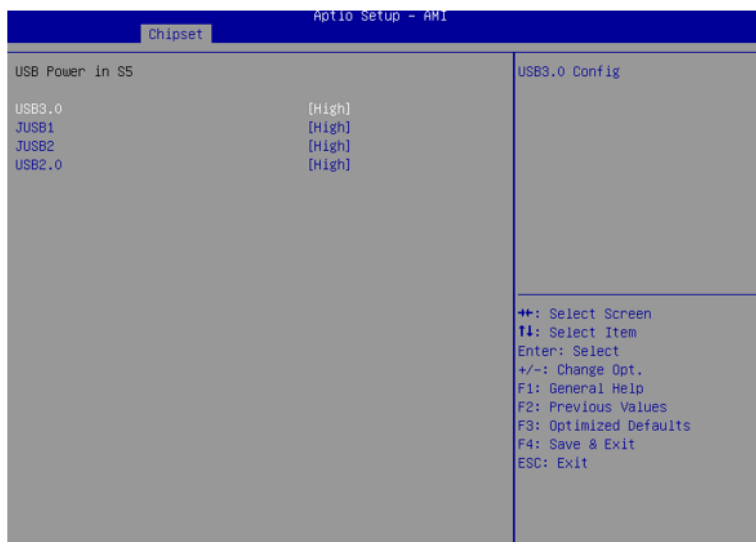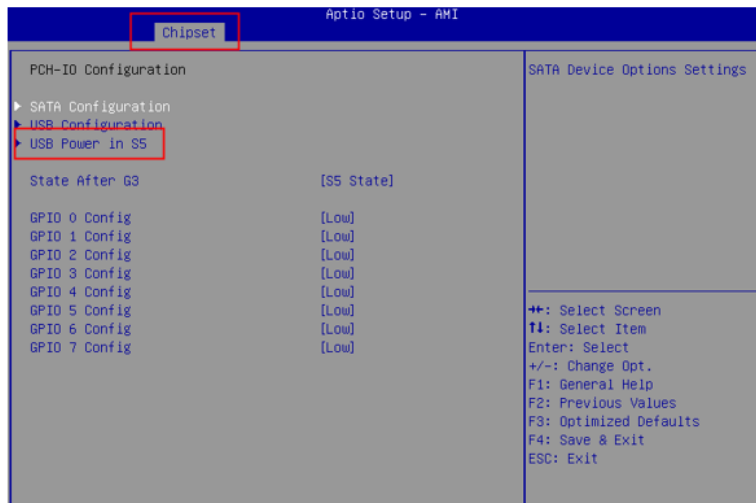

Select **"Chipset"** menu->**"PCH-IO Configuration"**-> **"USB Power in S5"** in order. Users can set the USB power in S5 according to the actual application's requirements and select High or Low to turn it on or off. After setting, press F4 to save and exit, the system will take effect after reboot.

4.4. Auto TURN-ON (AT/ATX)

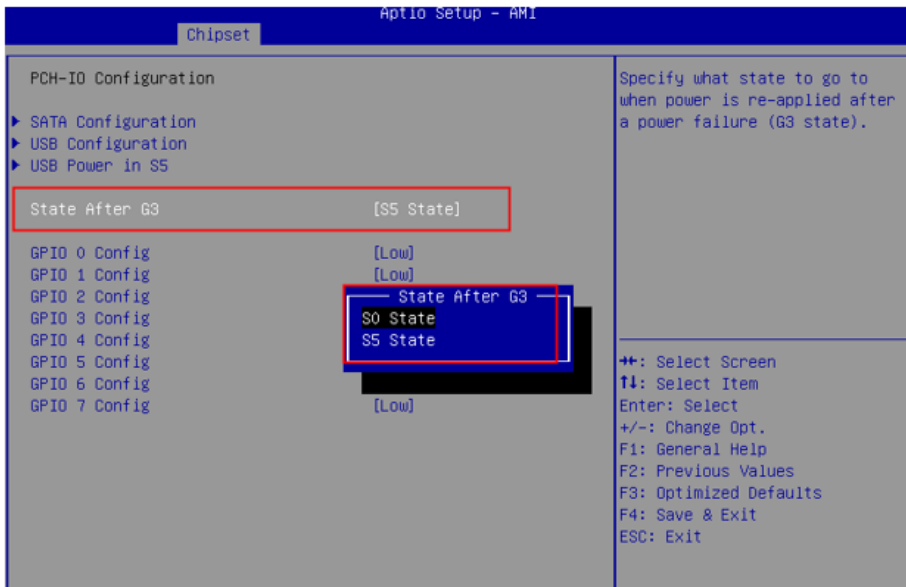

Enter "Chipset" menu, and select "Chipset"->"PCH-IO Configuration"->"State After G3" in order. Users can select "S0 State/S5 State" for power mode on the system. "S0 State" is AT mode, it will power on the system automatically after connecting the power supply, and S5 State is ATX mode. Users need to press the power button to turn on the system after connecting the power supply. **S5 State** is ATX mode. After connecting the power supply, you need to press the power button to power up the device. After setting, press F4 to save and exit, the system will take effect after reboot.


4.5. Security



Setting	Description
Administration Password	<p>To set up an administrator password:</p> <ol style="list-style-type: none"> 1. Select Administrator Password. 2. An Create New Password dialog then pops up onscreen. 3. Enter your desired password that is no less than 3 characters and no more than 20 characters. 4. Hit [Enter] key to submit.
User Password	<p>To set up an administrator password:</p> <ol style="list-style-type: none"> 1. Select User Password. 2. An Create New Password dialog then pops up onscreen. 3. Enter your desired password that is no less than 3 characters and no more than 20 characters. 4. Hit [Enter] key to submit.

Note: Users can select Administrator Password and User Password to set the administrator password and user password respectively, the minimum length is 3 digits, the maximum length is 20 digits.


4.6. Boot

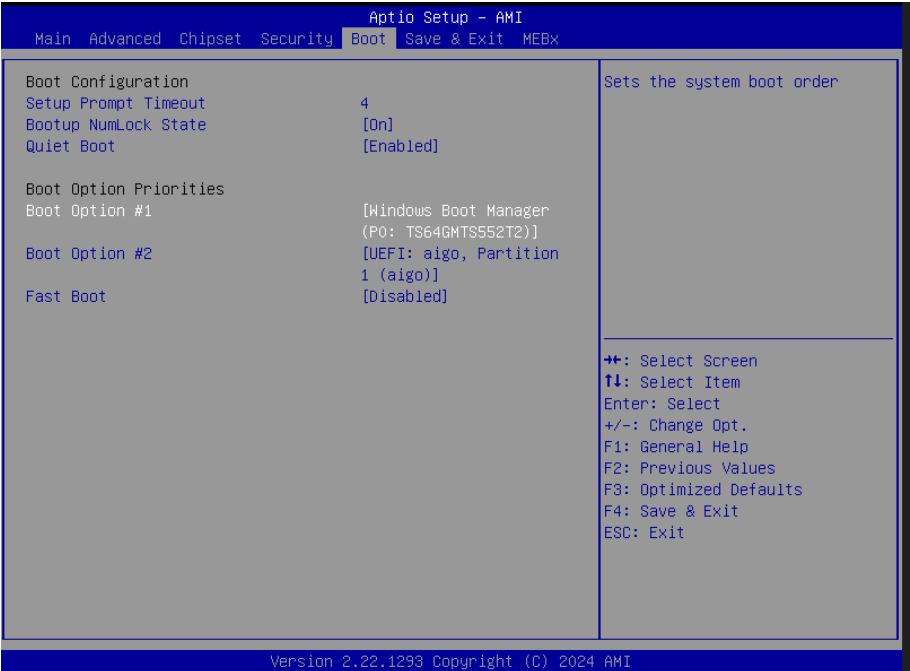

Setting	Description
Bootup NumLock State	► Set NumLock on or off when booting.
Quiet Boot	Sets whether to display the POST (Power-on Self Tests) messages or the system manufacturer's full screen logo during booting. Select Quiet Boot ► Enabled: Logo will be displayed at boot. ► Disabled: Show the self-test screen at boot, without logo.
Boot Option Priority	Set the system boot priorities. After setting press F4 to save and exit, the Changes will take effect upon reboot..

Note: After setting, press F4 to save and exit, the system will take effect upon rebooting your system.

4.7. Save & Exit

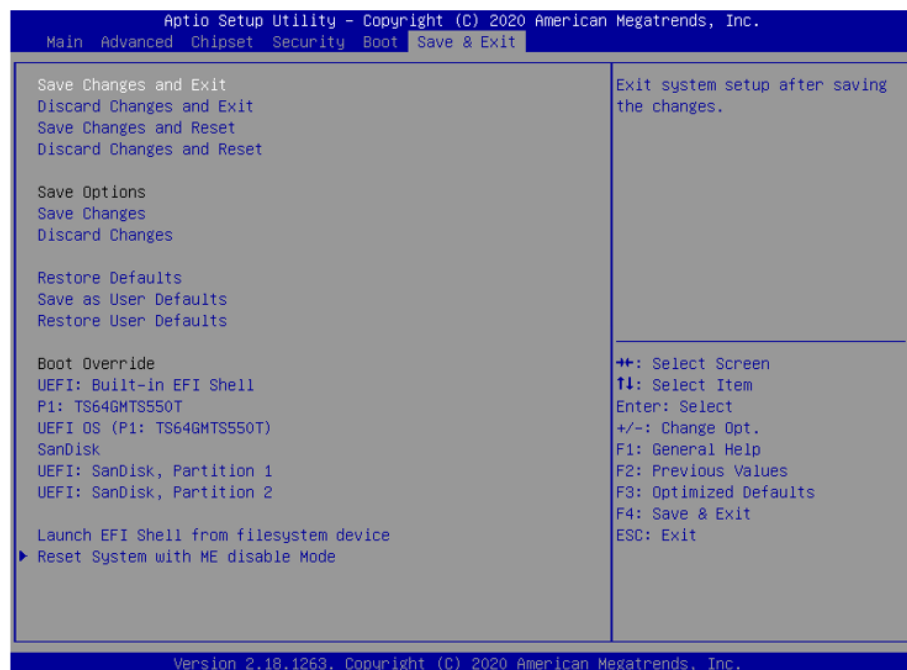

The Save & Exit menu displays the way to exit the BIOS setup utility. When users have completed the setup, users must save and exit for the changes to take effect.

Setting	Description
Save Changes and Exit	Save the changes and then restart the system.
Discard Changes and Exit	Discard the changes and restart the system.
Restore Defaults	Restore default values.
Boot Override	Set boot device priority.